



GBC[®]

Professional Finishing Solutions

Orca 64 Series




Wide Format Professional Series

ORCA 64 & ORCA 64-T.H.

These professional finishing systems are designed for large production, ease of operation and are priced very reasonably. Built for performance, the Orca 64 series laminators are extremely reliable and durable, and will outperform other machines on the market today.

The Orcas are developed with safety and efficiency in mind, from the newly styled safety shield right down to the quartz infrared heaters, that allow for rapid heat-up time.

The Orca 64 is available with top and bottom heat while the Orca 64-T.H. offers top heat only. The Orca laminators are the perfect choice for the production-oriented user.

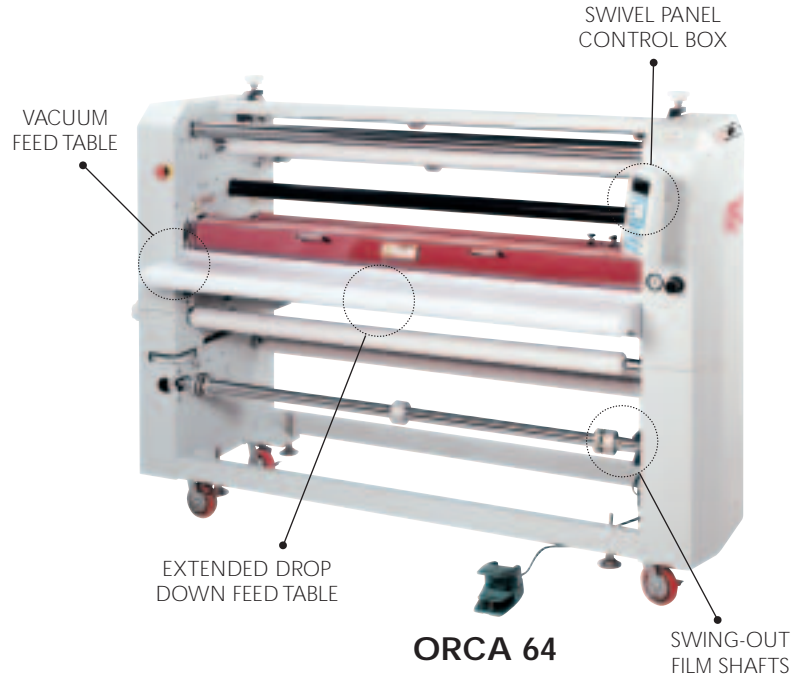

ORCA 64

ORCA 64 & ORCA 64-T.H. OFFERS MANY FEATURES

EASY TO USE

- New one touch "MasterDial" control allows the operator to simply press a MODE button (speed, pressure, heat) and turn the dial to set the precise parameters.



- The ergonomically designed control box is mounted into a swivel panel, making the digital display panel easy to read and easily accessible.
- Vacuum feed table holds the graphic in place allowing the image to be easily fed into the laminator.
- Drop down feed table allows for easy film loading.
- Swing out film shafts make loading extremely easy.

VERSATILE

- Multiple unwinds and rewinds allows for numerous application set-ups and greater operational flexibility.
- Independently controlled upper and lower heaters (Orca 64) permit using thermal and pressure-sensitive films at the same time.
- Top heat roller (Orca 64-T.H.) is perfect for running jobs primarily with PSA films.

SUPERIOR QUALITY

- Pneumatically controlled roller pressure offers better adhesion.
- Infrared heaters speed heat-up time and maintain a consistent, even temperature across the roller for improved lamination quality.
- Large chill idler roller cools prints and ensures flat output.

FILMS

- Octiva™ Thermal
- Octiva Lo-Melt
- Arctic™ Pressure-Sensitive
- Arctic Mounting
- AccuShield™

APPLICATIONS:

- Store Signage
- Posters
- Photo Mounting
- Event Graphics
- Show Graphics
- Presentations
- Vehicle Graphics
- Floor Graphics
- Backlit Displays
- Banners

SPECIFICATIONS:

Film Capacity:	
Width:	64" (162.5 cm) PSA 62" (157.5 cm) Thermal
Diameter:	Up to 10" (25.4 cm) roll diameter on a 3" (7.6 cm) core
Material Thickness:	Up to 1" (2.54 cm)
Unwind/Rewind:	2-unwinds; 3-rewinds
Speed:	Orca 64 up to 10 fpm (3 meters/min) Orca 64-T.H. up to 20 fpm (6 meters/min)
Dimensions:	82" W x 33" D x 55" H (208 cm W x 83.8 cm D x 140 cm H)
Weight:	Orca 64 1468 lbs. (547.6 kg) Orca 64-T.H. 1150 lbs. (429 kg)
Power Requirements	Orca 64 220 V, 60 Hz, 25 A, UL, CE, CSA, TUV Listed Orca 64-T.H. 110 V, 60 Hz, 13 A, UL, CE, CSA, TUV Listed
Plug Configuration:	Orca 64 NEMA 6-50P Orca 64-T.H. NEMA 5-15 (Standard 115 VAV)
Air Requirements:	100 psi/3 cfm



+52(55)2595-1495/5672-5955 +52(55)5672-5069

Monrovia 226 Col. Portales. México, D.F. 03300

ventas@masterfot.com.mx www.masterfot.com.mx